

## Discontinued model TD-250T → Recommended replacement model TD-260T

### Difference at a glance

Appearance	External dimensions	Performance	Key operation
○	○	Up	○

### Outline of Specifications changed


specification	TD-250T	TD-260T
Bridge voltage (BV)	DC10V、2.5V±10%	DC10V、2.5V±10%
Singal input range	±3.0mV/V	±3.2mV/V
Equivalent input	0.3 to 3.0mV	0.3 to 3.2mV
Nonlinearity	0.02%FS+1Digit	0.01%FS+1Digit
Analog filter	4,10,100Hz(default),3KHz	4,10,30,100,300 Hz (-12 db/oct)
Display/Characters	16mm,7-segment red LED	14.6mm,7-segment green LED
Display Range	±19999	-19999 to 99999
Refresh rate	3,6,13,25times/sec	4,6,10,20times/sec
AC power rating	100 to 240 V ±10% 50 - 60Hz AC,7W	100 to 240 V ±10% 50 - 60Hz AC, 13 W
Safety standard	EN61010-1	Installation class I, EN61010-1 Pollution degree 2 Overvoltage category II, CE marking
Weight	Approx. 1000g	Approx. 950 g

### Appearance and dimensions



#### Discontinued model/TD-250T



#### Replacement model/TD-260T

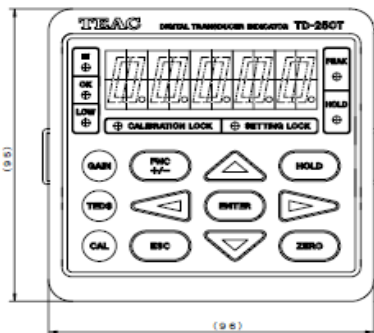

Unit: mm

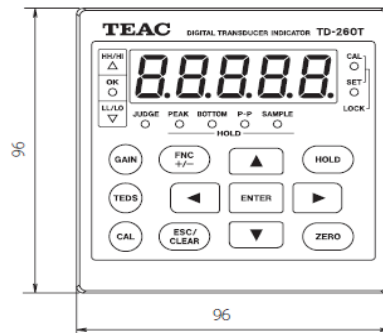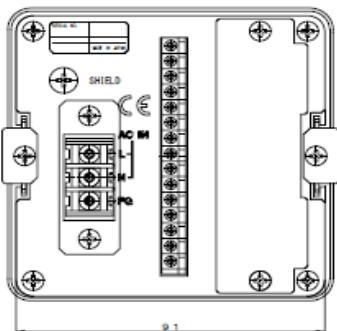

Unit: mm

