



Features

Surface contact
Flat type

Body Material

Beryllium copper

Compression Load Cell

Applications

Ideal for pressurizing force control of bonding machines.

Mounting Method

Bonding, Housing

Durable Robot Cable standardized

Enhanced durability against bending that occurs in moving parts with frequent repetitive motion, such as industrial robots and machine tools. High stability and reliability are realized.

Plug & Play with built-in TEDS

With the TD series indicators, equivalent input calibration, likely to forget in manual setting, can be performed automatically and help prevention. (See the reverse page for detail on TEDS)

Specifications


| | | |
|------------------------------------|--|-----------------------------|
| Type | Compression Load Cell | |
| Model | TC-MFSR(T)□□N-G | |
| | TEDS (Embedded in the body) | RoHS (10 substances) |
| Rated Capacity (R.C.) | 20N | 50N |
| Natural Frequency | 23kHz | 23kHz |
| Weight (Approx.) | 2g | 2g |
| Safe overload rating | 120 % R.C. | |
| Rated Output (R.O.) | 1mV/V | |
| Linearity | 0.5% R.O. | |
| Hysteresis | 0.5% R.O. | |
| Repeatability | 0.3% R.O. | |
| Zero Balance | ±10% R.O. | |
| Safe Excitation Voltage | 6V | |
| Input Terminal Resistance | 350±20Ω | |
| Output Terminal Resistance | 350±20Ω | |
| Insulation Resistance | 1000MΩ or more (DC50V) | |
| Compensated Temperature Range | 0 to 60°C | |
| Permissible Temperature Range | -10 to 80°C | |
| Temperature Effect on Zero Balance | 2% R.O. / 10°C | |
| Temperature Effect on Output | 1% R.C. / 10°C | |
| Cable | Φ2, 6-core shielded, 3m direct connection robot cable with bare lead wires | |
| Mounting Method | Bonding, Housing | |
| Body Material | Beryllium copper | |

Dimensional drawings (Units: mm)

TEAC Load Cells

Since the 1980s, when TEAC started manufacturing and selling load cells, we have cultivated technologies to achieve higher precision and smaller size with our unique structures. With these technologies, a number of load cells that achieve high response, high accuracy, and high stability, as well as products that take environmental conservation into consideration have been developed to match customers' applications. We also offer customization for specific conditions (usage environment, space) that are difficult to meet with standard ones. From one-off prototypes to mass production, we support engineers involved in research and development on manufacturing technology.

Examples of application

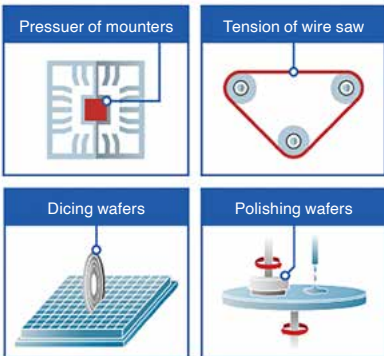


Robot Cable standardized

Robot cables provide enhanced durability and stable performance against bending that occurs in moving parts with frequent repetitive motion, such as industrial robots and machine tools.

Every TEAC's ultra-compact load cells employ robot cables, together with the TEDS function, contribute to factory automation and labor savings.

* Customized proposals that match your application and environment are available. Please contact our sales representatives for detail.

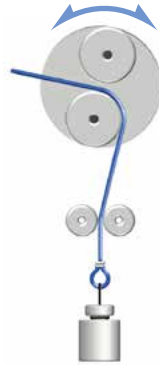


As shown above, fix the core wire so that it does not move, bend it 90 degrees to the left or right, and confirm that no wire breakage occurs.

TEDS-compatible

The TEDS (Transducer Electronic Data Sheet) system is a generic term for a description format standardized by IEEE that electronically reads and writes sensor's specific characteristic, which is recorded in an EEPROM built into the sensor and can be read and written electronically.

Model name, serial number, sensitivity (output value against physical quantity) and other calibration factors are digitized and recorded in the memory built into the load cell body. Sensor's specific values can be set electronically, automating the reading of recorded information and equivalent input calibration, eliminating human error in setting and reducing the burden of load cell replacement.

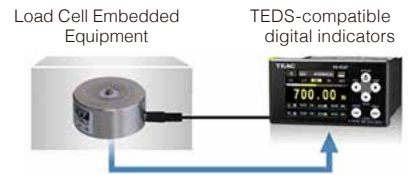

Sending individual specific values of each load cell indicated in the unit's Data Sheet

TEAC has been strongly promoting TEDS (IEEE 1451.4 Transducer Electronic Data Sheet) compliance for load cells and load cell indicators. We are the first Japanese manufacturer that obtained a "Manufacturer ID", making our load cells and indicators TEDS-compatible.

Related Products (Indicators and Signal Conditioners)



New
EtherNet/IP[™] model
CC-Link model

92 x 92mm
Panel opening size

Color Graphics Digital Indicator
TD-9000T
RS-485 model
EtherNet/IP[™] model
CC-Link model

High performance model with large LCD

Supporting two inputs, force sensor and displacement sensor, various comparison judgments function, and direct saving of waveform data onto large capacity internal memory.

- TEDS
- RoHS
- 4.3" LCD
- Touch Panel
- 5,000 time/sec.
- 24-bit
- Load/Vary Inputs
- Waveform
- Static Strain
- Interrupt Check
- High/Low Limit Compare
- Judgements
- D/A OUT
- RS-232C
- Bilingual

CC-Link EtherNet/IP



92 x 45mm
Panel opening size

Digital Indicator
TD-700T
Standard model
CC-Link model
RS-485 model

Excellent model with compact and high functionality

Supporting five key functions in one unit, numeric display, graph display, TEDS function, static strain display, and signal conditioner. This small and cost-effective TD-700T achieves equal or even higher performance to upper-class models, with high-visibility color LCD and various hold functions.

- TEDS
- RoHS
- 4,000 time/sec.
- 24-bit
- Static Strain
- Waveform
- Bar Meter
- D/A OUT
- Data Rec
- Various Holds
- Bilingual
- AC/DC Power

CC-Link



New

Attaches to common DIN rails

Signal Conditioner
TD-SC1
D/A model
RS-485 model

Slim and light-weight signal conditioner

Supporting high-speed sampling of 20,000 times/second, PC-based configuration via USB connection, selectable network, and TEDS calibration function.

- TEDS
- RoHS
- Plug-in
- 20,000 time/sec.
- 24-bit
- Static Strain
- Bilingual
- High/Low Limit Compare
- Hold Functions

CC-Link* EtherNet/IP*

* Under planning



Weights only 320g (incl. batteries)

Portable Digital Indicator
TD-01 Portable

On-site checking tool with versatility

Supporting various functions that equal to embedded systems, in hand-held size, allowing you to take measurements anytime anywhere, according to your purpose.

- TEDS
- RoHS
- Color LCD
- Waveform
- Bar Meter
- High/Low Limit Compare
- Data Rec
- Static Strain
- Interrupt Check
- D/A OUT
- Dual I/O
- 24-bit
- AA Batteries
- Long Time Operation
- Bilingual

CE

EtherNet/IP is a trademark of ODVA, Inc. Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective holders.