




# ULTRAMINIATURE 5V OUTPUT HIGH TEMPERATURE PRESSURE TRANSDUCER WITH INTEGRATED TEMPERATURE SENSOR


## MAKS-6T(X)

- Smallest High Performance Amplified Transducer Worldwide
- High Temperature Electronics 392°F (200°C)
- Rugged Design Provides Compatibility With Most Corrosive and Conductive Media
- Patented Leadless Technology **VIS**<sup>®</sup>
- High Over Pressure Capability
- Adaptable For A Wide Variety Of Applications
- Designed and Engineered For Severe Environmental Conditions

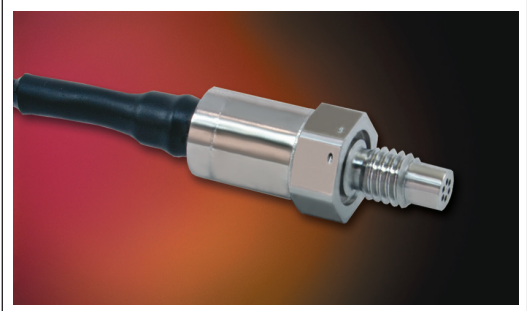

The MAKS-6T(X) is one of the newest generation of Kulite's smallest miniature amplified transducers currently available. The sensing sub-assembly is protected from mechanical damage by a protective screen, which has been shown to have minimal influence on the frequency response of the sensor.

Incorporation of Kulite proprietary high temperature 392°F (200°C) electronics within the main body allows for operation from an unregulated power supply of 8 to 16VDC.

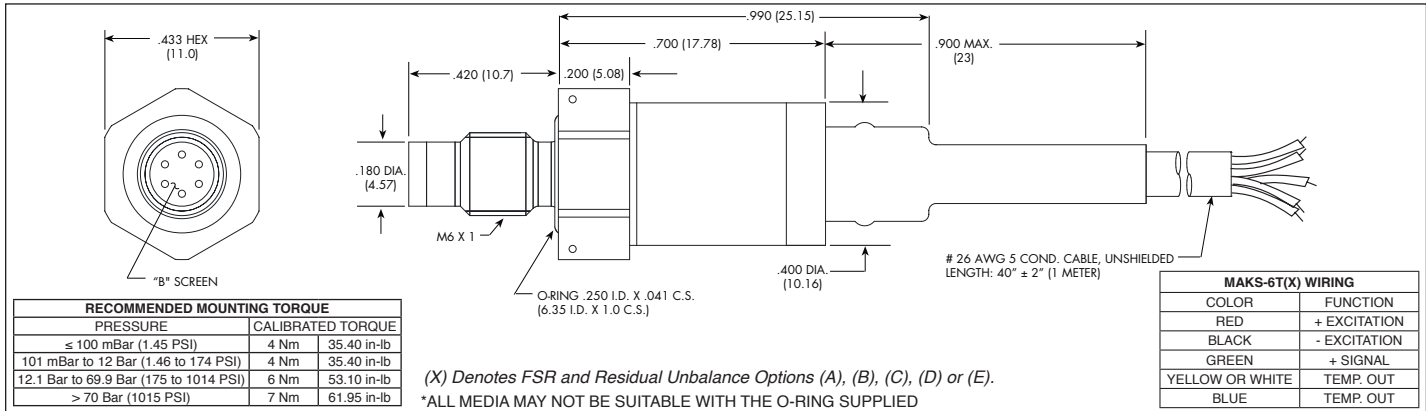

|  | 1  | 5                    | 10                   | 15                   | 80   | 140                  | 210                  | 300 BAR              |
|--|--|----------------------|----------------------|----------------------|--|----------------------|----------------------|----------------------|
| <b>INPUT</b>   | 15   | 73                   | 145                  | 218                  | 1160   | 2030                 | 3045                 | 4350 PSI             |
| Pressure Range                                       | Absolute, Sealed Gage  |                      |                      |                      |  |                      |                      |                      |
| Operational Mode                                     | 2 Times Rated Pressure < 35 BAR (508 PSI), 1.5 Times Rated Pressure ≥ 35 BAR (508 PSI), Max. Pressure 350 BAR (5076 PSI) |                      |                      |                      |  |                      |                      |                      |
| Over Pressure  | 3 Times Rated Pressure Max. Pressure: 350 BAR (5076 PSI)   |                      |                      |                      |  |                      |                      |                      |
| Burst Pressure                                       | Most Conductive Liquids and Gases  |                      |                      |                      | Any Liquid or Gas Compatible With 15-5 PH and 316 SS |                      |                      |                      |
| Pressure Media                                       | 8 - 16 VDC   |                      |                      |                      |  |                      |                      |                      |
| Rated Electrical Excitation                          | 10 mA (Max.)   |                      |                      |                      |  |                      |                      |                      |
| Maximum Electrical Current                           | 0.3mA (1mA Max.)   |                      |                      |                      |  |                      |                      |                      |
| RTD Excitation                                       | 1000 Ohms Platinum, DIN EN 60751 Tables, Class A (65% Response Time 8.6 Seconds Max.) in Liquid                          |                      |                      |                      |  |                      |                      |                      |
| RTD  | 5 Ohms (Typ.)  |                      |                      |                      |  |                      |                      |                      |
| Output Impedance                                     | 4.5V ± 50 mV (A)   | 4.9V ± 50 mV (B)     | 4.9V ± 50 mV (C)     | 4.5V ± 50 mV (D)     | 4.75V ± 50 mV (E)                                    |                      |                      |                      |
| Full Scale Reading (X)                               | DC to 5 kHz  |                      |                      |                      |  |                      |                      |                      |
| Bandwidth (-3dB)                                     | 500 ± 50 mV (A)  | 350 ± 50 mV (B)      | 300 ± 50 mV (C)      | 150 ± 50 mV (D)      | 300 ± 50 mV (E)                                      |                      |                      |                      |
| Residual Unbalance (X)                               | ± 0.1% FSO BFSL (Typ.), ± 0.25% FSO (Max.)   |                      |                      |                      |  |                      |                      |                      |
| Combined Non-Linearity, Hysteresis and Repeatability | Infinitesimal  |                      |                      |                      |  |                      |                      |                      |
| Resolution   | 6.5x10 <sup>-4</sup>   | 2.3x10 <sup>-4</sup> | 1.4x10 <sup>-4</sup> | 1.1x10 <sup>-4</sup> | 3.6x10 <sup>-5</sup>                                 | 2.5x10 <sup>-5</sup> | 1.9x10 <sup>-5</sup> | 1.5x10 <sup>-5</sup> |
| Acceleration Sensitivity % FS/g Perpendicular        | > 100 Megohm Min. @ 50 VDC   |                      |                      |                      |  |                      |                      |                      |
| Insulation Resistance                                | -4°F to +392°F (-20°C to +200°C)   |                      |                      |                      |  |                      |                      |                      |
| Operating Temperature Range                          | +68°F to +392°F (+20°C to +200°C)  |                      |                      |                      |  |                      |                      |                      |
| Compensated Temperature Range                        | ± 1.5% FS/100°C ≤ 217.5 PSI (15 BAR), ± .75% FS/100°C ≥ 217.5 PSI (15 BAR)   |                      |                      |                      |  |                      |                      |                      |
| Total Error Band (Excluding End Points)              | 100g Peak, Sine up to 5000 Hz  |                      |                      |                      |  |                      |                      |                      |
| Linear Vibration                                     | 100g half Sine Wave 11 msec. Duration  |                      |                      |                      |  |                      |                      |                      |
| Mechanical Shock                                     | 5 Conductor 26 AWG Cable 1 Meter Long  |                      |                      |                      |  |                      |                      |                      |
| Electrical Connection                                | 10 Grams (Max.) Excluding Cable  |                      |                      |                      |  |                      |                      |                      |
| Weight   | Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon                                       |                      |                      |                      |  |                      |                      |                      |
| Pressure Sensing Principle                           | See Table  |                      |                      |                      |  |                      |                      |                      |
| Mounting Torque                                      |  |                      |                      |                      |  |                      |                      |                      |

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (E) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2016 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.